
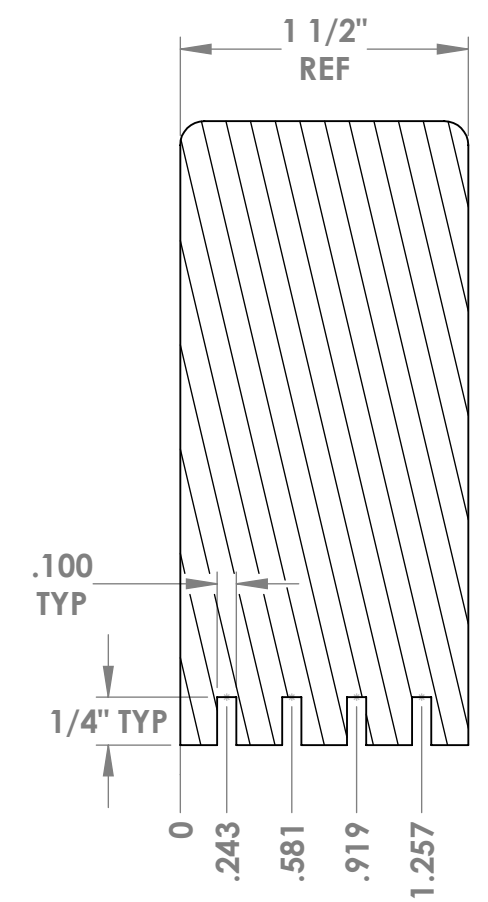


SECTION A-A

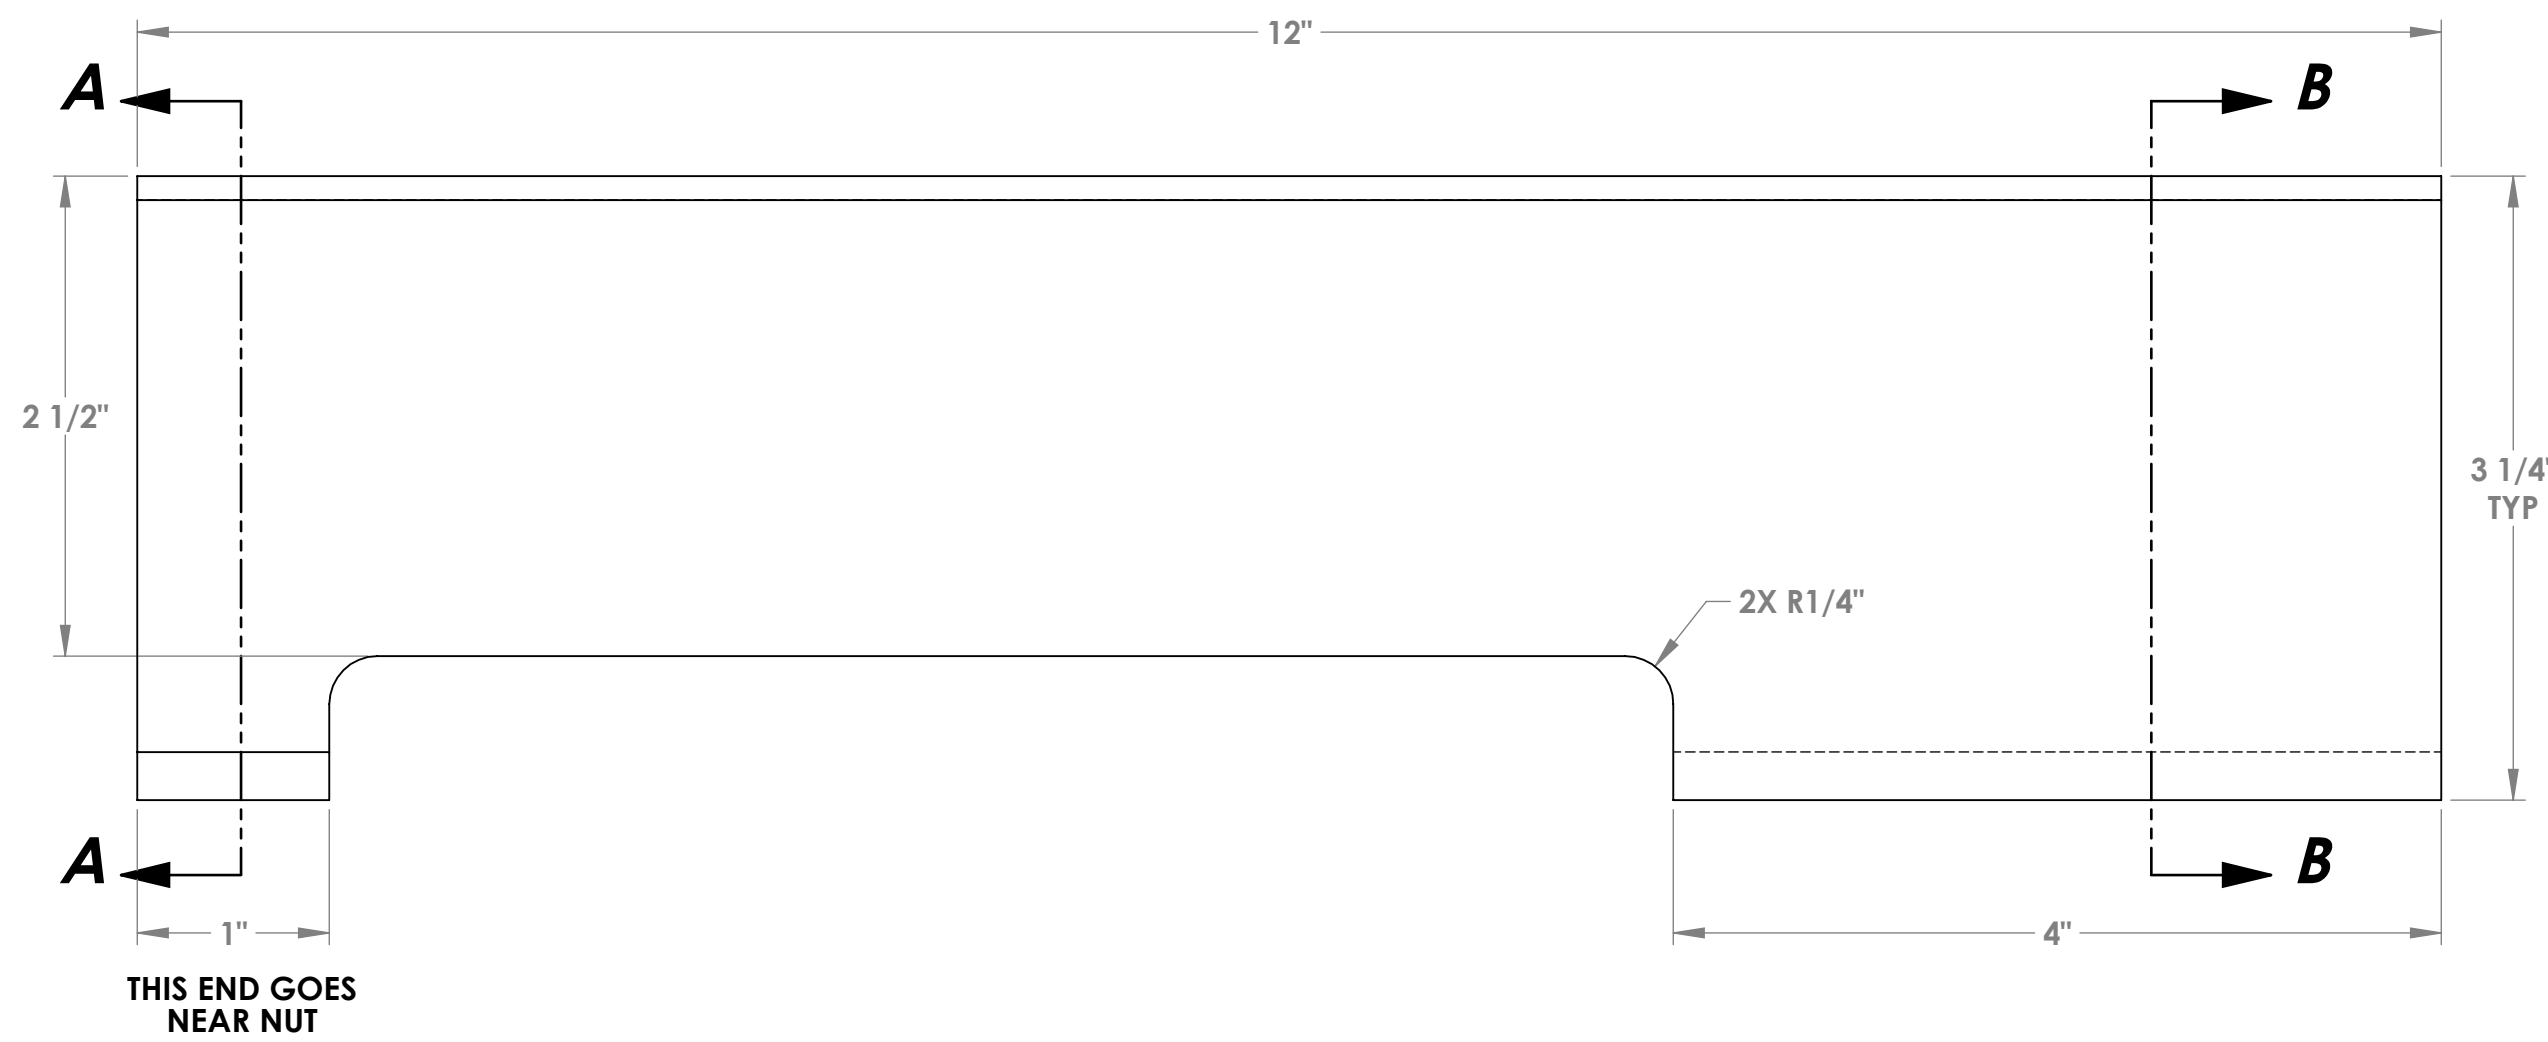

SECTION B-B

MAKE FROM FIR 2X4

DESIGNED ASSUMING 1.438" STRING SPACING AT THE NUT AND 2.063 STRING SPACING AT THE SADDLE. BLOCK PLACED BETWEEN THE NUT & FIRST FRET. SOME APPLICATIONS MAY REQUIRE PLACING THE BLOCK FURTHER UP THE NECK.

DRAWN BY DWF		DATE 7/12/16	DWF DWF GUITARS DWF.GUITARS@GMAIL.COM	
UNLESS OTHERWISE SPECIFIED ALL DIMENSION ARE IN INCHES.		TOLERANCES: .XX ±.01 .XXX ±.005 FRACTIONS ±1/64 ANGLES ±1°	PROJECT:	
CONFIDENTIAL THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF DWF GUITARS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED BY ANYONE WITHOUT THE EXPRESS WRITTEN PERMISSION OF DWF GUITARS		TITLE: NECK BACK BOWING BLOCK		
		SIZE C	DWG No.	REV
		SCALE: 1:1	SHEET: 1 of 1	